

# Seismic Grade Reinforcing Mesh


**SE73DE**

## Mesh Specification

Product Description: 5.0m x 2.27m — 300 x 300 Grid R7.5 Line Wire, R7.5 Cross Wire

	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm <sup>2</sup> /m	Wire kg/m	Weight (kg)
Longitudinal Wire 1	7.5 R	300	5000	8	25 25	147.3	0.3468	13.87
Longitudinal Wire 2	5.5 R	75	5000	2	25 25		0.1865	1.87
Cross Wire	7.5 R	300	2270	19	10 10	147.3	0.3468	14.96
<b>GROSS SHEET WEIGHT (Kg):</b>								30.69
<b>MASS PER SQ METER (Kg/m<sup>2</sup>):</b>								2.312

## Mesh Sketch (not to scale)

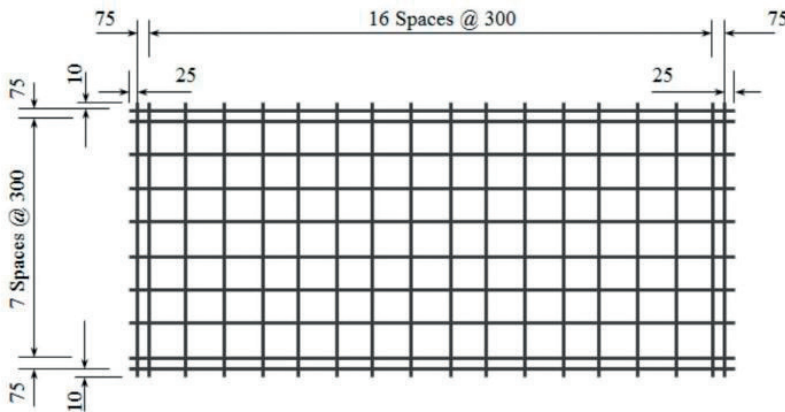


GROSS SHEET AREA (m <sup>2</sup> )	11.35
NETT COVER (m <sup>2</sup> )	10.08
Ratio STACK & TURNED (Y/N):	Y
No. OF SHEETS / BUNDLE: 2	20
ESTIMATED CUBIC (m <sup>3</sup> )	0.1277
BUNDLE WEIGHT (Tonnes):	0.6139


## Mechanical Properties

Uniform Elongation %	Yield Strength		Tensile Ratio		Weld Shear Strength
	Min	Max	Min	Max	
≥ 10 %	500MPa	600MPa	1.15	1.4	> 9.6

### LAPPING ON ENDS



### LAPPING ON SIDES



### Mesh App:

Download our free smart-phone app by visiting the Apple or Google stores. Alternatively, scan the QR code from your phone to download directly.

