

Seismic Grade Reinforcing Mesh

SE62 NI

Mesh Specification


Product Description: 5.85m x 2.42m — 200 x 200 Grid R6.1 Line Wire, R6.1 Cross Wire

	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)		mm ² /m	Wire kg/m	Weight (kg)
Longitudinal Wire	6.1 R	200	5850	13	25	25	146.1	0.2294	17.45
Cross Wire	6.1 R	200	2420	30	10	10	146.1	0.2294	16.65

GROSS SHEET WEIGHT (Kg): 34.10

MASS PER SQ METER (Kg/m²): 2.294

Mesh Sketch (not to scale)

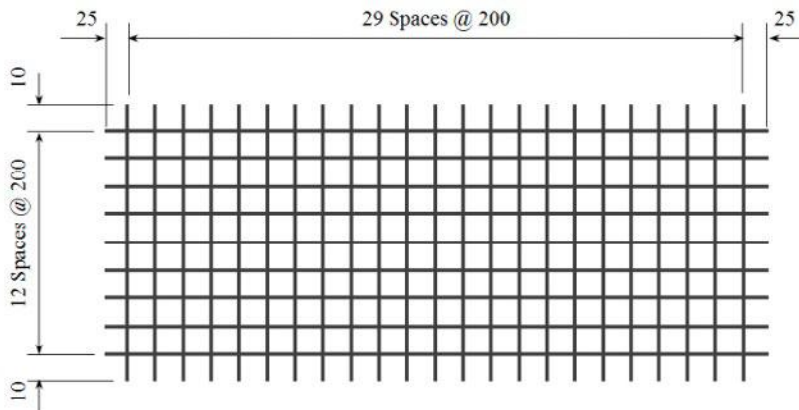


GROSS SHEET AREA (m ²)	14.157
NETT COVER (m ²)	11.932
Ratio STACK & TURNED (Y/N):	Y
No. OF SHEETS / BUNDLE: 2	25
ESTIMATED CUBIC (m ³)	2.2453
BUNDLE WEIGHT (Tonnes):	0.8525

Mechanical Properties (characteristic values)


Uniform Elongation %	Yield Strength		Tensile Ratio	
	Min	Max	Min	Max
≥ 10 %	500MPa	600MPa	1.15	1.4

Minimum weld shear strength 7.3kN

LAPPING ON ENDS



LAPPING ON SIDES



Product is fully tested for conformance to AS/NZS 4671:2001 and B1/VM1 paragraph 14-.

*All measurements/weights approximate.

Mesh App:

Download our free smart-phone app by visiting the Apple or Google stores. Alternatively, scan the QR code from your phone to download directly.



Available on the
App Store

Available on the
Android Market

