

Reinforcing Mesh Product Guide

Super Ductile 500E
and Hard Drawn
North Island

Mesh

Fletcher Reinforcing supplies the reinforcing steel and mesh that provides the strength to New Zealand's buildings and infrastructure.

Mesh is available from national Building Merchants or our branch network to construction sites and builders throughout New Zealand.

Fletcher Reinforcing offer a range of New Zealand manufactured mesh. The range covers both Super Ductile mesh in grade 500E wire and a proven range of hard drawn mesh in the sizes required by builders and contractors throughout New Zealand.



Super Ductile 500E

SUPER DUCTILE 500E™

The Ministry of Building, Innovation & Employment (MBIE) requires that reinforcing for concrete slabs-on-ground buildings built in accordance with NZS 3604, have a minimum of 2.27 kg/m² of Grade 500E reinforcing mesh fabric which conforms with AS/NZS4671:2019.

Super Ductile 500E meets these requirements:

- Grade 500E (seismic) as per AS/NZS 4671:2019
High tensile – grade 500 (500MPa)
High ductility – class E (10% uniform elongation)
- Weight per m² complies with NZS 3604 (min 2.27kg/m²)



Hard Drawn Mesh

Fletcher Reinforcing offers a range of mesh sheet sizes and centres to meet the needs of typical New Zealand non-ductile applications.

Our range covers standard sheet sizes of 4.65m x 1.97m through to our larger economical sheets which are 6.15m x 2.42m. Centres are either 150 x 150mm or the 'step through' option of 300 x 300mm.



New Zealand Standards

Standards New Zealand controls the preparation and publishing of all national Standard Specifications and Codes of Practice in New Zealand.

They are developed by expert committees using a consensus-based process that facilitates public input.

The relevant Standards listed below, specify the mechanical properties of the steel used for concrete reinforcement, including welded fabric and methods of application in respect to concrete reinforcement.


Visit www.standards.govt.nz for more information.

AS/NZS4671:2019


Specification for steel for the reinforcement of concrete, including Welded Fabric (mesh)

The pitch (a) of longitudinal bars and transverse bars shall not be less than 50 mm. The pitch shall be measured as

shown below. The tolerance of the pitch shall not be more than +/-0.075 times the specified value.

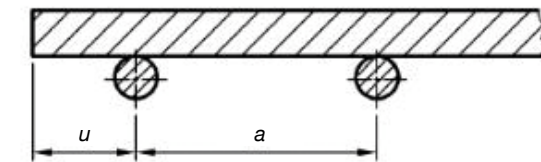

(a) Single-bar meshes

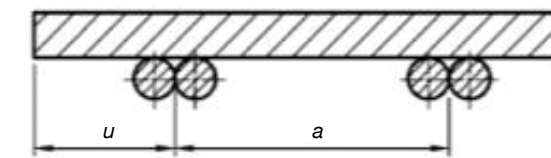

(b) Twin-bar meshes

Legend:

u = edge overhang of a bar in mesh (mm)
a = pitch of bars in a mesh (mm)

NZS3101:2006

Standard for The Design of Concrete Structures

This Standard lays out the development length and lap-splice requirements for plain wire mesh and deformed

wire mesh, and is the basis of any pertinent calculations or recommendations given in this Product Guide.

Load-Bearing Equivalents

Hard Drawn Mesh

Conventional Designation	Wire Diameter	Centres	Standard				Fletcher Reinforcing Item
			Length (mm)	Width (mm)	Nett Cover (m²)		
668	4.0	150	4560	1980	7.525		668L
665	5.3	150	4560	1980	7.525		665L
663	6.3	150	4560	1980	7.525		663L
661	7.5	150	4560	1980	7.525		661L

Conventional Designation	Wire Diameter (mm)	Centres	300 Centres				Fletcher Reinforcing Item
			Length (mm)	Width (mm)	Nett Cover (m²)		
668	5.6	300	5000	2240	11.20		84/10
665	7.5	300	5000	2240	11.20		147/10

Equivalents are based on load-bearing capacity i.e. the nominal sectional area of steel per metre width.

Note: Additional meshes are available as a special order. Minimum order quantities will apply. Please contact your local Fletcher Reinforcing Branch for further details.

Super Ductile 500E Mesh

Conventional Designation	Wire Diameter (mm)	Centres	Length (mm)	Width (mm)	Nett Cover (m²)	Fletcher Reinforcing Item
665	6.1	200	5050	2020	8.312	SE62Res*
665	6.1	200	5850	2420	11.93	SE62*
665	7.5	300	5000	2270	10.08	
664	7.0	200	5650	2220	10.432	SE72
662	8.0	200	5650	2220	10.432	SE82
661	9.0	200	5650	2220	10.432	SE92

***What does SE62 mean?** AS/NZS 4671:2019 designates letters to be used to identify welded mesh products:

- S = Square (shape of grid centres)
- E = Seismic grade (earthquake)
- 6 = 6mm wire
- 2 = 200mm centres

Equivalents are based on load-bearing capacity i.e. the nominal sectional area of steel per metre width.

Hard Drawn Wire Mesh

Super Ductile Wire Mesh

485 Mpa						Min: 500 MPa Max: 600MPa						
Wire Diameter (mm)	Centres (mm)	Cross Section (mm² /m)	Mass per m² (kg/m²)	Nett Cover (m²)	Fletcher Reinforcing Item	Conventional Designation	Wire Diameter (mm)	Centres (m²)	Cross Section (mm² /m)	Mass per m² (kg/m²)	Nett Cover (m²)	Fletcher Reinforcing Item
4.0	150	83.8	1.315	7.525	668L	668						
5.6	300	82.1	1.289	11.20	84/10	668						
5.3	150	147.1	2.309	7.525	665L	665	6.1	200	146.1	2.294	8.312	SE62Res
7.5	300	147.3	2.312	11.20	147/10	665	6.1	200	146.1	2.294	11.93	SE62
						665	7.5	300	147.3	2.312	10.08	SE73DE
						664	7.0	200	192.4	3.02	10.432	SE72
6.3	150	207.8	3.263	7.525	663L	663						
						662	8.0	200	251.3	3.946	10.432	SE82
						661	9.0	200	318.1	4.994	10.432	SE92

Equivalents are based on load-bearing capacity i.e. the nominal sectional area of steel per metre width.

Note: Additional meshes are available as a special order. Minimum order quantities will apply.
Please contact Your local Fletcher Reinforcing Branch for further details.

Equivalents are based on load-bearing capacity i.e. the nominal sectional area of steel per metre width.

Note: Additional meshes are available as a special order. Minimum order quantities will apply. Please contact your local Fletcher Reinforcing Branch for further details.

Seismic Grade Reinforcing Mesh

SE62 Res NI

SUPER

DUCTILE

500E

TM

Mesh Specification

Product Description: 5.05m x 2.02m – 200 x 200 Grid R6.1 Line Wire, R6.1 Cross Wire.
Product is fully tested for conformance to AS/NZS 4671:2019.

	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm²/m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	6.1 R	200	5050	11	25	146.1	0.2294	12.74
Cross Wire	6.1 R	200	2020	26	10	146.1	0.2294	12.05


Gross Sheet Weight (kg):	24.79	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m²):	2.294	No. of Sheets / Bundle: 2	25
Gross Sheet Area (m²)	10.201	Estimated Cubic (m³)	0.0933
Nett Cover (m²)	8.312	Bundle Weight (Tonnes):	0.6198

Mechanical Properties (characteristic values)

Uniform Elongation %	Yield Strength		Tensile Ratio	
	Min	Max	Min	Max
≥ 10 %	500MPa	600MPa	1.15	1.4

Minimum weld shear strength 7.3kN

Mesh Sketch (not to scale)

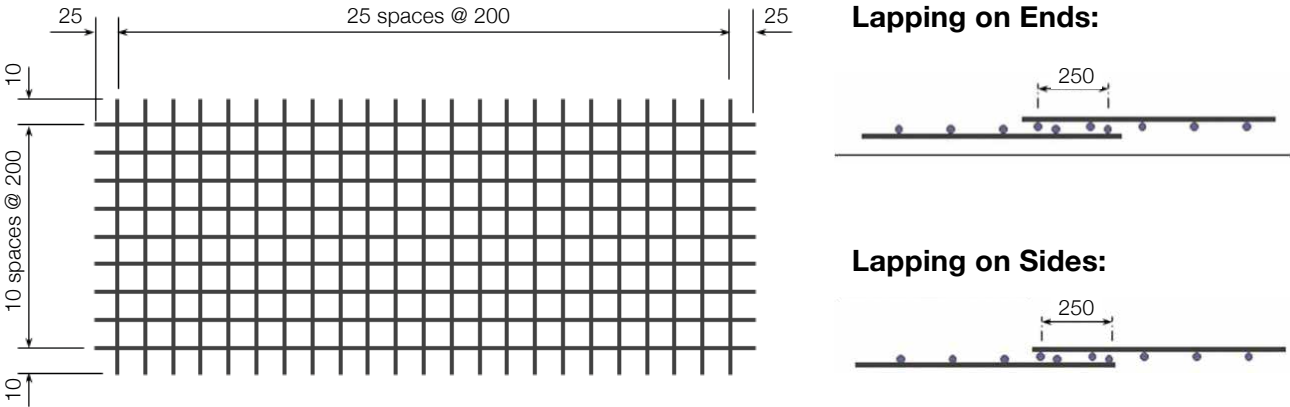

*All measurements/weights approximate.

Seismic Grade Reinforcing Mesh

SE62 NI

SUPER

DUCTILE

500E

TM

Mesh Specification

Product Description: 5.85m x 2.42m – 200 x 200 Grid R6.1 Line Wire, R6.1 Cross Wire.
Product is fully tested for conformance to AS/NZS 4671:2019.

	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm²/m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	6.1 R	200	5850	13	25	146.1	0.2294	17.45
Cross Wire	6.1 R	200	2420	30	10	146.1	0.2294	16.65


Gross Sheet Weight (kg):	34.10	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m²):	2.294	No. of Sheets / Bundle: 2	25
Gross Sheet Area (m²)	14.157	Estimated Cubic (m3)	2.2453
Nett Cover (m²)	11.932	Bundle Weight (Tonnes):	0.8525

Mechanical Properties (characteristic values)

Uniform Elongation %	Yield Strength		Tensile Ratio	
	Min	Max	Min	Max
≥ 10 %	500MPa	600MPa	1.15	1.4

Minimum weld shear strength 7.3kN

Mesh Sketch (not to scale)

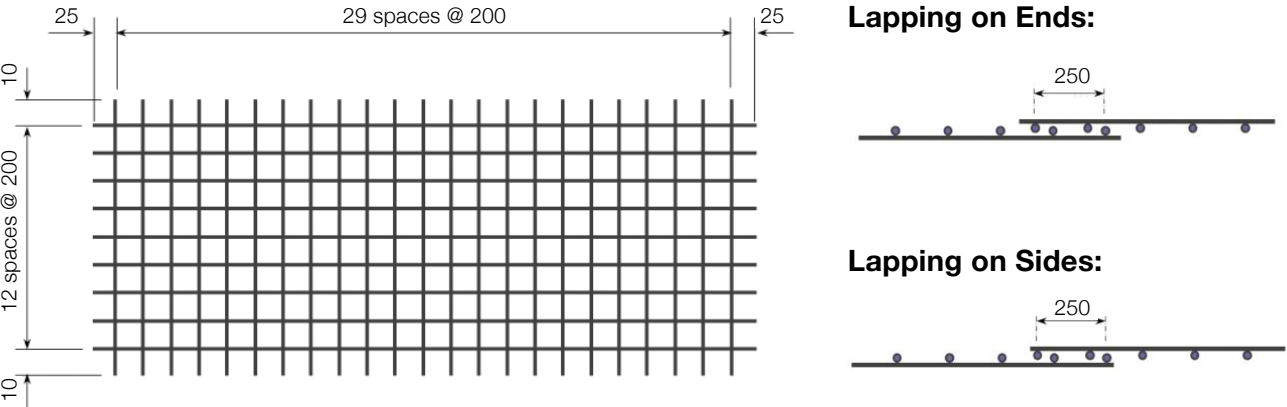

*All measurements/weights approximate.

Seismic Grade Reinforcing Mesh

SUPER

DUCTILE

500E™

SE72 NI

Mesh Specification

Product Description: 5.65m x 2.22m – 200 x 200 Grid R7.0 Line Wire, R7.0 Cross Wire.
Product is fully tested for conformance to AS/NZS 4671:2019.

	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm²/m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	7.0 R	200	5650	12	25	192.4	0.3021	20.48
Cross Wire	7.0 R	200	2220	29	10	192.4	0.3021	19.45


Gross Sheet Weight (kg):	39.93	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m²):	3.021	No. of Sheets / Bundle: 2	25
Gross Sheet Area (m²)	12.543	Estimated Cubic (m³)	2.2828
Nett Cover (m²)	10.432	Bundle Weight (Tonnes):	0.9983

Mechanical Properties (characteristic values)

Uniform Elongation %	Yield Strength		Tensile Ratio	
	Min	Max	Min	Max
≥ 10 %	500MPa	600MPa	1.15	1.4

Minimum weld shear strength 9.6kN

Mesh Sketch (not to scale)

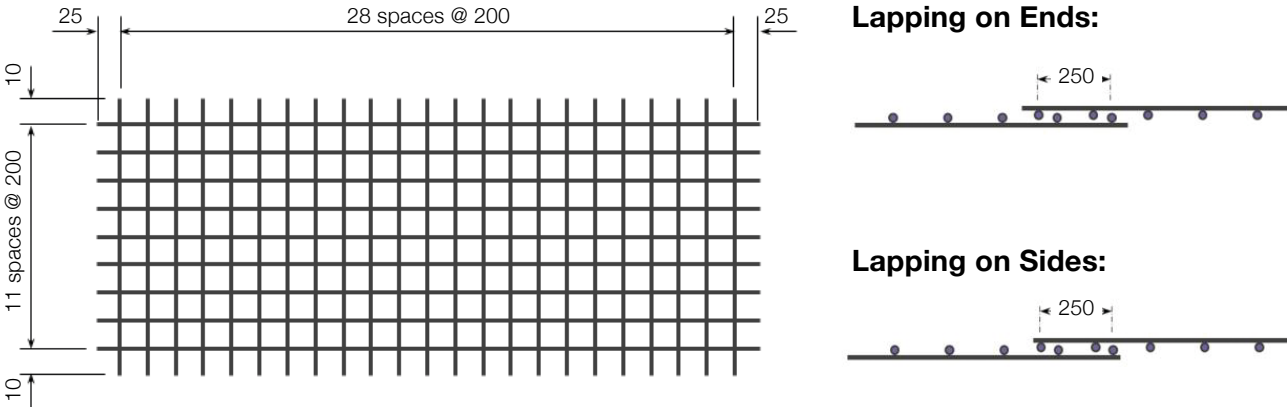

*All measurements/weights approximate.

Seismic Grade Reinforcing Mesh

SUPER

DUCTILE

500E™

SE82 NI

Mesh Specification

Product Description: 5.65m x 2.22m — 200 x 200 Grid R8.0 Line Wire, R8.0 Cross Wire.
Product is fully tested for conformance to AS/NZS 4671:2019.

	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm²/m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	8.0 R	200	5650	12	25	251.3	0.3946	26.75
Cross Wire	8.0 R	200	2220	29	10	251.3	0.3946	25.40


Gross Sheet Weight (kg):	52.16	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m²):	3.946	No. of Sheets / Bundle: 2	25
Gross Sheet Area (m²)	12.543	Estimated Cubic (m³)	2.6089
Nett Cover (m²)	10.432	Bundle Weight (Tonnes):	1.3040

Mechanical Properties (characteristic values)

Uniform Elongation %	Yield Strength		Tensile Ratio	
	Min	Max	Min	Max
≥ 10 %	500MPa	600MPa	1.15	1.4

Minimum weld shear strength 12.6kN

Mesh Sketch (not to scale)

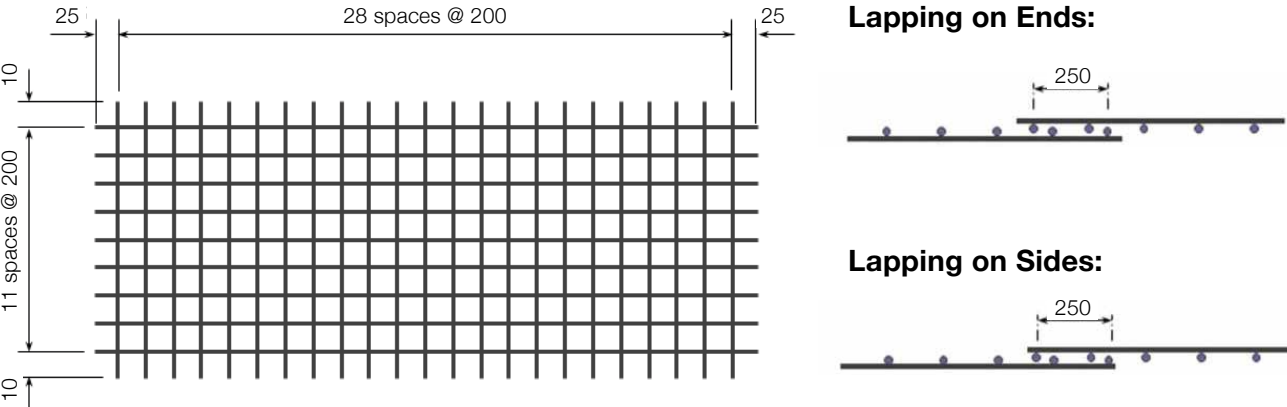

*All measurements/weights approximate.

Seismic United Steel / WirePlus
Grade Reinforcing Mesh **SE92**

SUPER
DUCTILE

500E™

Mesh Specification

Product Description: 5.65m x 2.22m – 150 x 150 Grid R8.0 Line Wire, R8.0 Cross Wire.
Product is fully tested for conformance to AS/NZS 4671:2019.

	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm²/m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	9.0 R	200	5650	12	25	318.1	0.4994	33.86
Cross Wire	9.0 R	200	2220	29	10	318.1	0.4994	32.15


Gross Sheet Weight (kg):	66.01	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m²):	4.994	No. of Sheets / Bundle: 2	15
Gross Sheet Area (m²)	12.543	Estimated Cubic (m³)	1.8062
Nett Cover (m²)	10.432	Bundle Weight (Tonnes):	0.9902

Mechanical Properties (characteristic values)

Uniform Elongation %	Yield Strength		Tensile Ratio	
	Min	Max	Min	Max
≥ 10 %	500MPa	600MPa	1.15	1.4

Minimum weld shear strength >15.9kN

Mesh Sketch (not to scale)

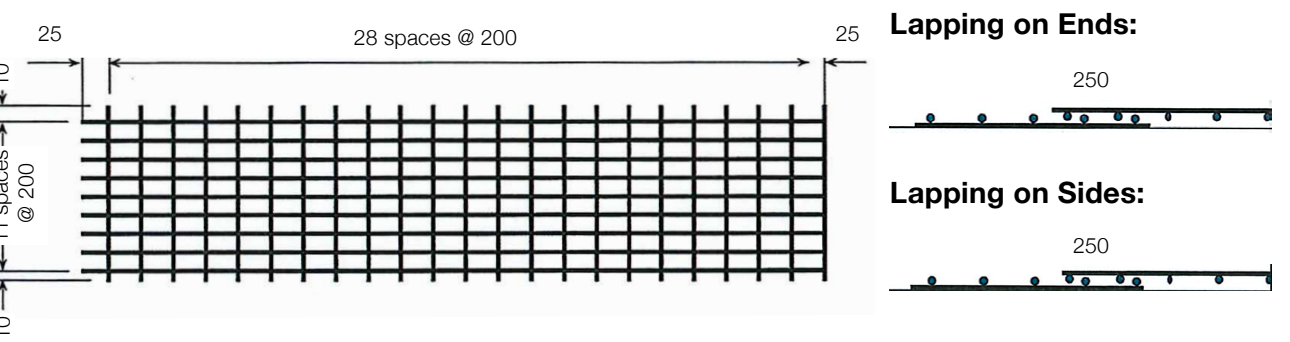

*All measurements/weights approximate.

Hard Drawn Reinforcing Mesh
668L NI

Mesh Specification

Product Description: 4.56m x 1.98m – 150 x 150 Grid R4.0 Line Wire, R4.0 Cross Wire.


	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm²/m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	4.0 R	150	4560	14	30	83.8	0.0986	6.29
Cross Wire	4.0 R	150	1980	31	15	83.8	0.0986	6.05

Gross Sheet Weight (kg):	12.34	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m²):	1.315	No. of Sheets / Bundle: 2	25
Gross Sheet Area (m²)	9.029	Estimated Cubic (m³) Bundle:	0.90
Nett Cover (m²)	7.525	Bundle Weight (Kg):	309

Mechanical Properties (characteristic values)

Wire Diameter	0.2% Proof Stress	
	Min	Max
4.0mm R	485MPa	750MPa

Mesh Sketch (not to scale)

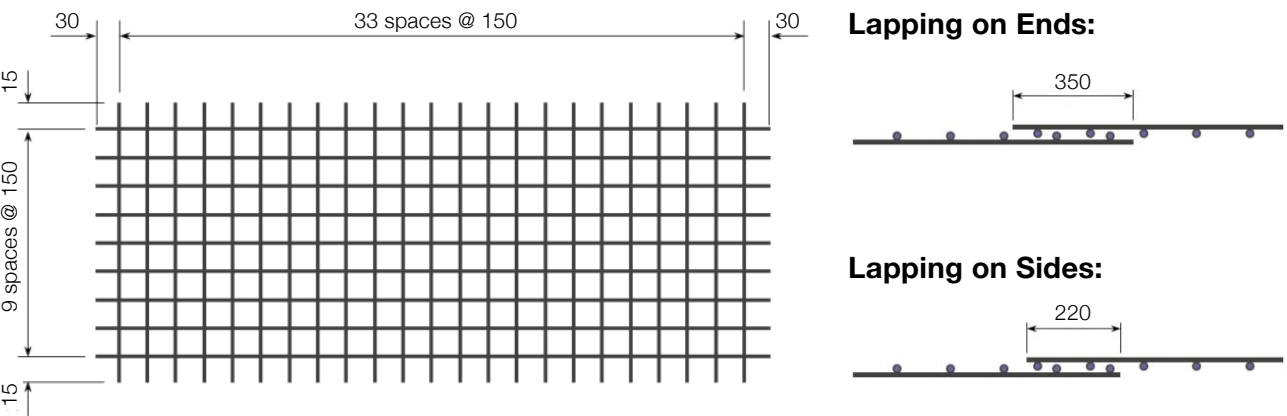

*All measurements/weights approximate.

Hard Drawn Reinforcing Mesh

665L NI

Mesh Specification

Product Description: 4.56m x 1.98m – 150 x 150 Grid R5.3 Line Wire, R5.3 Cross Wire.


	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm ² /m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	5.3 R	150	4560	14	30	147.1	0.1732	11.06
Cross Wire	5.3 R	150	1980	31	15	147.1	0.1732	10.63

Gross Sheet Weight (kg):	21.69	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m ²):	2.309	No. of Sheets / Bundle:	25
Gross Sheet Area (m ²):	9.029	Estimated Cubic (m ³) Bundle:	1.26
Nett Cover (m ²)	7.525	Bundle Weight (Kg):	542

Mechanical Properties (characteristic values)

Wire Diameter	0.2% Proof Stress	
	Min	Max
5.3mm R	485MPa	750MPa

Mesh Sketch (not to scale)

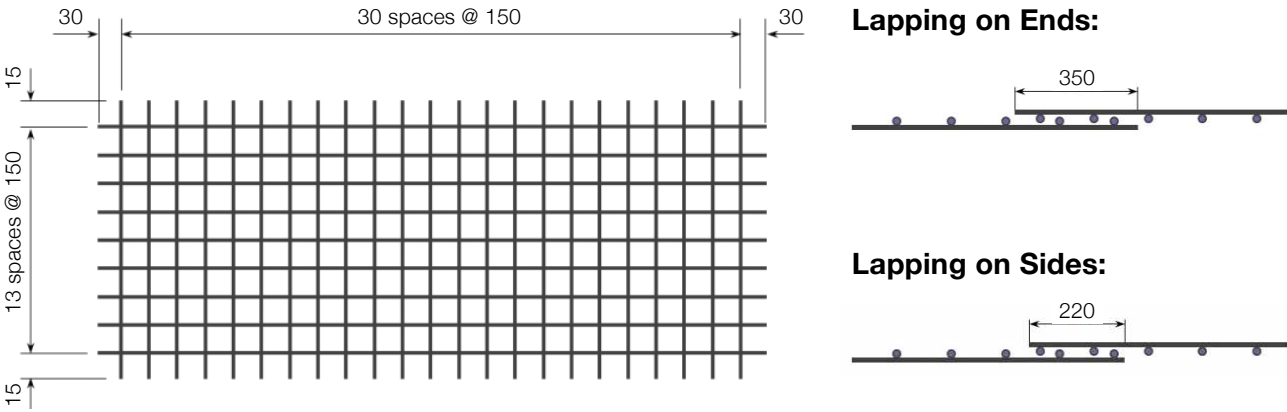

*All measurements/weights approximate.

Hard Drawn Reinforcing Mesh

663L NI

Mesh Specification

Product Description: 4.56m x 1.98m – 150 x 150 Grid R6.3 Line Wire, R6.3 Cross Wire.


	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm ² /m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	6.3 R	150	4560	14	30	207.8	0.2447	15.62
Cross Wire	6.3 R	150	1980	31	15	207.8	0.2447	15.10

Gross Sheet Weight (kg):	30.72	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m ²):	3.263	No. of Sheets / Bundle: 2	25
Gross Sheet Area (m ²):	9.029	Estimated Cubic (m ³) Bundle:	1.94
Nett Cover (m ²)	7.525	Bundle Weight (Kg):	766

Mechanical Properties (characteristic values)

Wire Diameter	0.2% Proof Stress	
	Min	Max
6.3mm R	485MPa	750MPa

Mesh Sketch (not to scale)

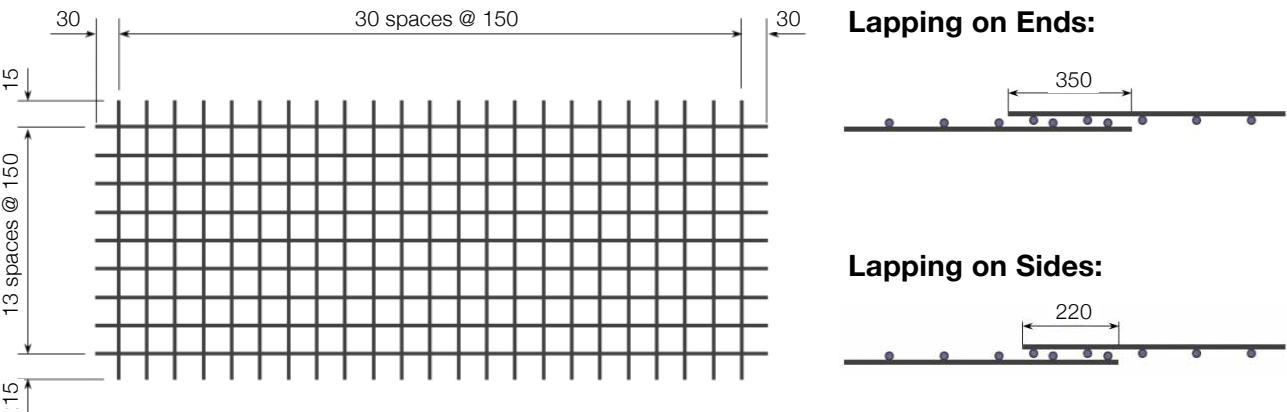

*All measurements/weights approximate.

Hard Drawn Reinforcing Mesh

84/10 NI

Mesh Specification

Product Description: 5.0m x 2.24m – 300 x 300 Grid D5.6 Line Wire, D5.6 Cross Wire.



	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm ² /m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	4.0 R	300	5000	6	50	82.1	0.1933	5.80
Edge Wire	4.0 R	50	5000	4	50		0.0986	1.97
Cross Wire	5.6 R	300	2240	19	20	82.1	0.1933	8.23

Gross Sheet Weight (kg):	16.00	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m ²):	1.289	No. of Sheets / Bundle:	25
Gross Sheet Area (m ²):	11.2	Estimated Cubic (m ³) Bundle:	1.45
Nett Cover (m ²)	10.08	Bundle Weight (Kg):	400

Mechanical Properties (characteristic values)

Wire Diameter	0.2% Proof Stress	
	Min	Max
5.6 R	485MPa	750MPa

Mesh Sketch (not to scale)

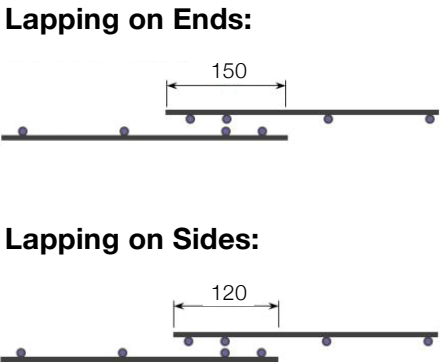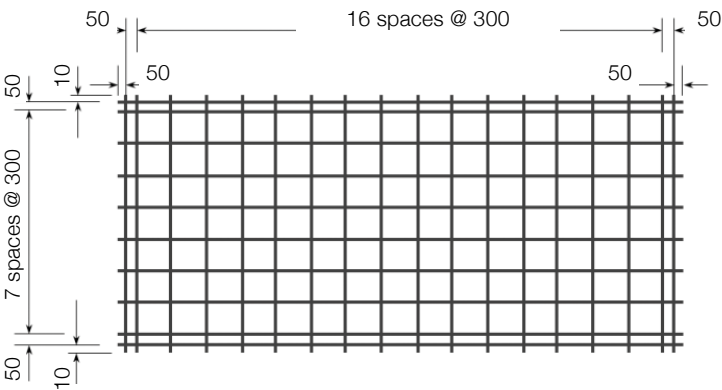

*All measurements/weights approximate.

Hard Drawn Reinforcing Mesh

147/10 NI

Mesh Specification

Product Description: 5.0m x 2.24m – 300 x 300 Grid D7.5 Line Wire, D7.5 Cross Wire



	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)	mm ² /m	Wire (kg/m)	Weight (kg)
Longitudinal Wire	7.5 D	300	5000	6	50	147.3	0.3468	10.40
Edge Wire	5.3 D	50	5000	4	50		0.1737	3.46
Cross Wire	7.5 D	300	2240	19	20	147.3	0.3468	14.76

Gross Sheet Weight (kg):	28.63	Ratio Stack & Turned (Y/N):	Y
Mass Per Square Meter (kg/m ²):	2.312	No. of Sheets / Bundle:	25
Gross Sheet Area (m ²):	11.20	Estimated Cubic (m ³) Bundle:	2.4
Nett Cover (m ²)	10.08	Bundle Weight (Kg):	715

Mechanical Properties (characteristic values)

Wire Diameter	0.2% Proof Stress	
	Min	Max
7.50 D	485MPa	750MPa

Mesh Sketch (not to scale)

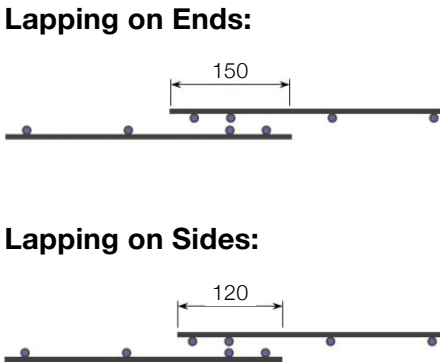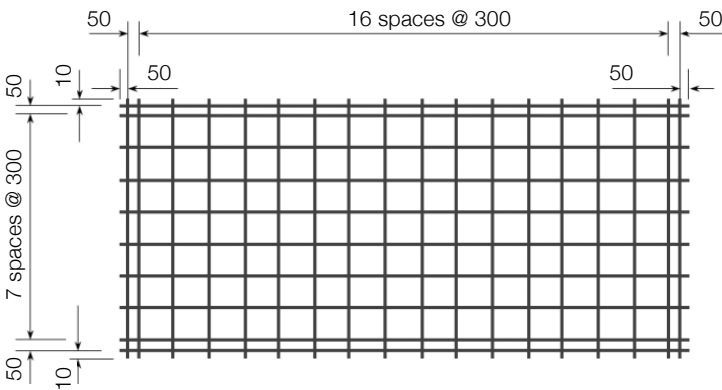

*All measurements/weights approximate.

North Island

Whangarei (Easysteel)

33 Rewa Rewa Road,
Whangarei 0110

P 09 470 2510
F 09 438 4586

Tauranga

99 Aviation Avenue,
Mount Maunganui,
Tauranga 3116

P 07 572 9708

Palmerston North (Easysteel)

120 Kaimanawa Street, Kelvin
Grove, Palmerston North 4414

P 06 354 2622
F 06 354 2623

Auckland

8 Gabador Place, Mount
Wellington, Auckland 1060

P 09 270 4247
F 09 270 0861

Rotorua (Easysteel)

95 – 97 Tallyho Street,
Mangakakahi, Rotorua 5013

P 07 348 3039
F 07 347 7353

Levin

43 South Road,
Horowhenua, Levin 5510

P 06 949 1700
F 06 367 0628

Hamilton

31 Gallagher Drive,
Melville, Hamilton 3206

P 07 843 0890
F 07 843 6176

Hawkes Bay (Easysteel)

1100 Omaha Road,
Tyford, Hastings 4175

P 06 873 9036
F 06 879 6880

Wellington (Easysteel)

110 Hutt Park Road,
Gracefield, Lower Hutt,
Wellington 5010

P 04 570 8472
F 04 570 8473

South Island

Nelson (Easysteel)

40 Beach Road,
Richmond, Nelson 7020

P 03 543 8215
F 03 544 0759

Dunedin

14 Neville Street,
Dunedin 9012

P 03 478 8105
F 03 488 2052

Invercargill (Easysteel)

54F Tweed Street,
Invercargill 9810

P 03 214 9099
F 03 214 9099

Christchurch

240 Waltham Road,
Waltham, Christchurch 8023

P 03 377 1190
F 03 365 7510

www.fletcherreinforcing.co.nz

As part of Fletcher Reinforcing's policy of continued product improvement, the company reserves the right, at any time, at their discretion and without notice to discontinue or change the features, designs, materials, colours and other specifications of their product and to either permanently or temporarily withdraw any such products from the market without incurring any liability. This publication is issued as a general guide only and should not be treated as a substitute for detailed technical advice in relation to individual circumstances. Fletcher Reinforcing disclaim any liability for loss or damage suffered from the use of such data. To the best of our knowledge, all information is correct at the time of printing. A division of Fletcher Building Ltd. Copyright June 2025 V11.00.00625

