

Hard Drawn Reinforcing Mesh

665L SI

Mesh Specification


Product Description: 4.65m x 1.97m — 150 x 150 Grid D5.3 Line Wire, D5.3 Cross Wire

	Wire Dia. (mm)	Spacing (mm)	Length (mm)	No. of Wires	Overhangs (mm)		mm ² /m	Wire kg/m	Weight (kg)
Longitudinal Wire	5.3 D	150	4650	14	75	75	147.1	0.1732	11.28
Cross Wire	5.3 D	150	1970	31	10	10	147.1	0.1732	10.58

GROSS SHEET WEIGHT (Kg): 21.85

MASS PER SQ METER (Kg/m²): 2.309

Mesh Sketch (not to scale)

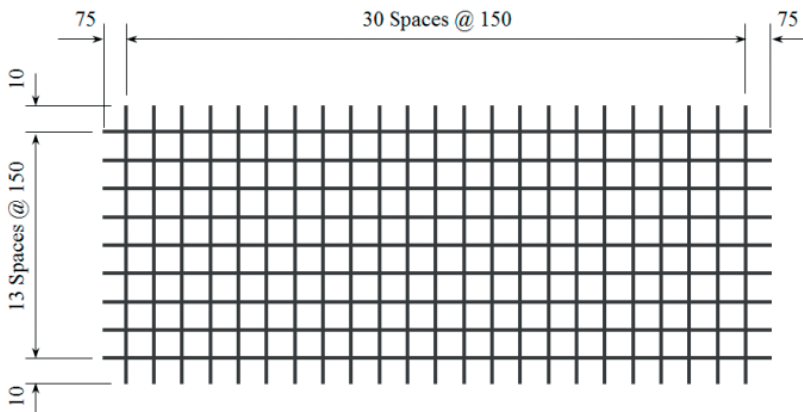


GROSS SHEET AREA (m ²)	9.161
NETT COVER (m ²)	7.525
Ratio STACK & TURNED (Y/N):	Y
No. OF SHEETS / BUNDLE: 2	25
ESTIMATED CUBIC (m ³)	0.0728
BUNDLE WEIGHT (Tonnes):	0.5463


Mechanical Properties

Wire Diam	Uniform Elongation %	0.2% Proof Stress		Ratio R _m / R _e
		Min	Max	
< 5.0mm	≥ 1.5%	485MPa		≥ 1.03%
≥ 5.0mm	≥ 1.5%	485MPa	750MPa	≥ 1.03%

LAPPING ON ENDS



LAPPING ON SIDES



*All measurements/weights approximate.

Mesh App:

Download our free smart-phone app by visiting the Apple or Google stores. Alternatively, scan the QR code from your phone to download directly.

